


MAINTENANCE:  
REPAIR/REPLACE BAFFLES WHEN THEY  
COLLAPSE, TEAR OR DECOMPOSE.

REMOVE SEDIMENT WHEN CELL IS 1/2 FULL.


PERSPECTIVE VIEW

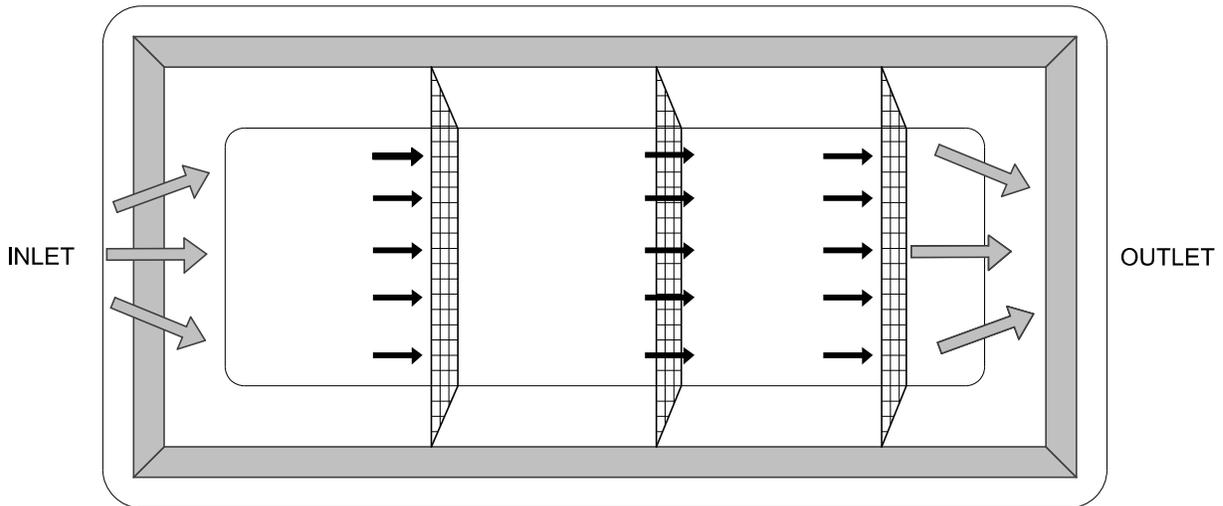

TOP VIEW

NOTE:

- 3 BAFFLES (MIN) BETWEEN INLET & OUTLET.
- SEE N.C. DENR EROSION and SEDIMENT CONTROL PLANNING and DESIGN MANUAL FOR CONDITIONS WHERE PRACTICE APPLIES; PLANNING CONSIDERATION & DESIGN CRITERIA.

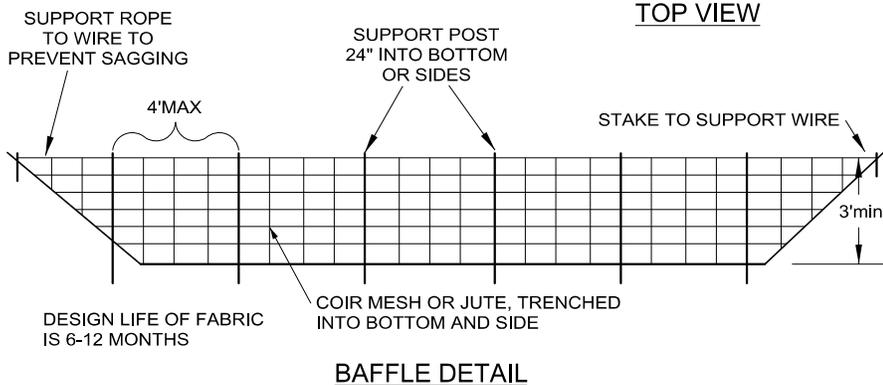

BAFFLE DETAIL

CITY OF RALEIGH PUBLIC WORKS DEPARTMENT		
REVISIONS	DATE: 9/1/13	NOT TO SCALE
TEMPORARY SEDIMENT TRAP		
<b>SW-20.05</b>		