PAY LIMITS FOR CURB RAMP

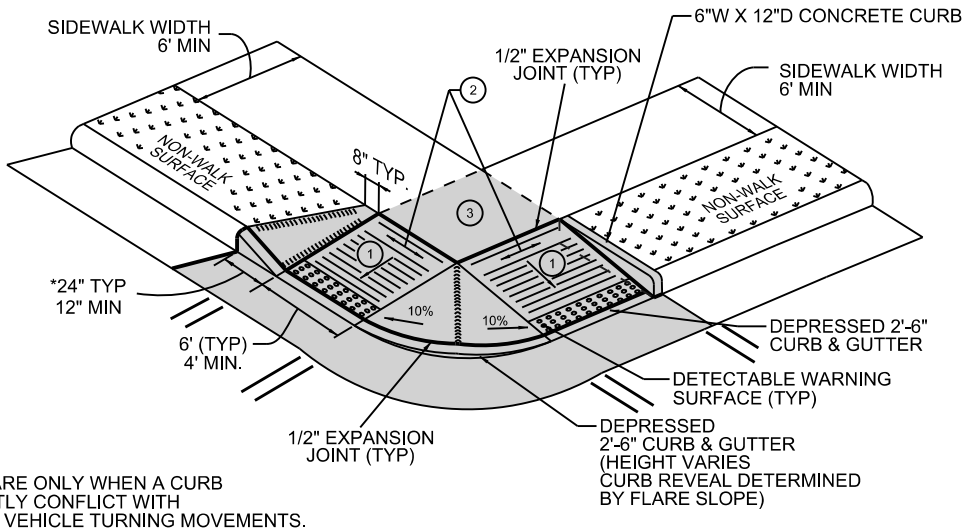

NOTE: * USE SMALL FLARE ONLY WHEN A CURB WOULD DIRECTLY CONFLICT WITH APPROACHING VEHICLE TURNING MOVEMENTS.

CONCRETE DEPTH	
RAMP / FLARE	6"
LANDING	4"

TYPE N-3

1. 8.33% (12:1) MAX RAMP SLOPE
2. CROSS SLOPE: 2.00%
3. CURB RAMPS REQUIRE A (4'-0") MINIMUM LANDING WITH A MAXIMUM CROSS SLOPE AND LONGITUDINAL SLOPE OF 2.00% WHERE PEDESTRIANS PERFORM TURNING MANEUVERS. SLOPE TO DRAIN TO CURB.

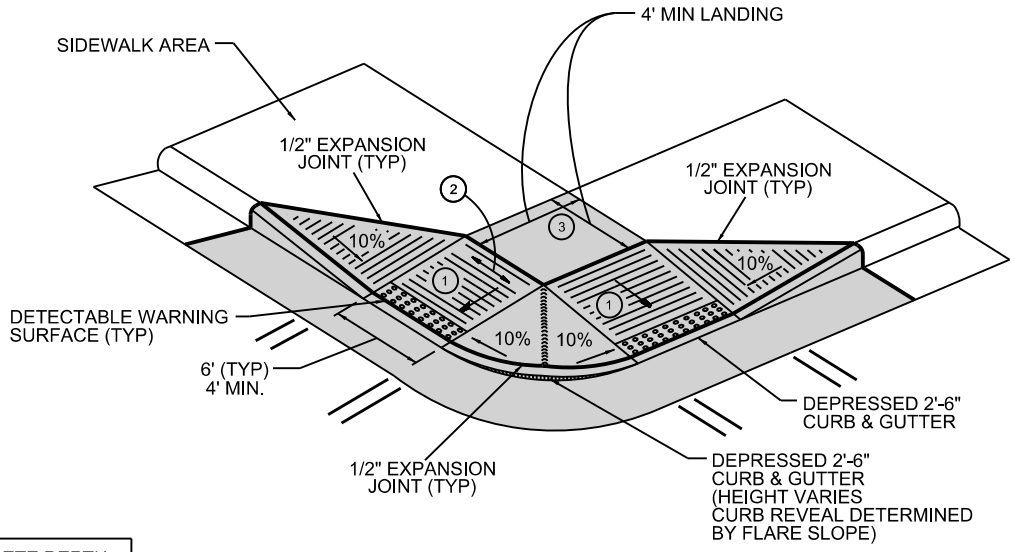

CONCRETE DEPTH	
RAMP / FLARE	6"
LANDING	4"

TYPE N-3A
(COMMERCIAL/RETAIL USE)

SHEET 3 OF 6

CITY OF RALEIGH
PUBLIC WORKS DEPARTMENT

REVISIONS	DATE: 9/1/13	NOT TO SCALE
1-13-2014	SIDEWALK ACCESS RAMPS	